

A Probabilistic Logic Programming Event Calculus

Jason Filippou, Alexander Artikis, Anastasios Skarlatidis
and Georgios Paliouras

Institute of Informatics and Telecommunications, NCSR Demokritos
Patriarchou Grigoriou and Neapoleos St., GR-15310,
Aghia Paraskevi, Athens, Greece
{jfilip, a.artikis, anskarl, paliourg}@iit.demokritos.gr

Abstract

We present a system for recognising human activity given a symbolic representation of video content. The input of our system is a set of time-stamped short-term activities (STA) detected on video frames. The output is a set of recognised long-term activities (LTA), which are pre-defined temporal combinations of STA. The constraints on the STA that, if satisfied, lead to the recognition of a LTA, have been expressed using a dialect of the Event Calculus. In order to handle the uncertainty that naturally occurs in human activity recognition, we adapted this dialect to a state-of-the-art probabilistic logic programming framework. We present a detailed evaluation and comparison of the crisp and probabilistic approaches through experimentation on a benchmark dataset of human surveillance videos.

1 Introduction

A common approach to human activity recognition separates low-level from high-level recognition. The output of the former type of recognition is a set of activities taking place in a short period of time: ‘short-term activities’ (STA). The output of the latter type of recognition is a set of ‘long-term activities’ (LTA), which are temporal combinations of STA. We focus on high-level recognition.

We define a set of LTA of interest, such as ‘fighting’ and ‘meeting’, as temporal combinations of STA such as ‘walking’, ‘running’, and ‘inactive’ (standing still) using a logic programming (Prolog) implementation of the Event Calculus (EC) [21]. We employ EC to express the temporal constraints on a set of STA that, if satisfied, lead to the recognition of a LTA.

In earlier work [3] we identified various types of uncertainty that exist in activity recognition, such as erroneous STA detection. To address this issue, we extend our work by presenting Prob-EC, an EC dialect suitable for probabilistic activity recognition. Prob-EC operates on the state-of-the-art proba-

bilistic logic programming framework ProbLog [19]. Prob-EC, therefore, may operate in settings where STA occurrences are assigned a confidence value by the underlying low-level tracking system (such as, for example, a probabilistic classifier). We present extensive experimental evaluation of Prob-EC on a benchmark activity recognition dataset. The evaluation demonstrates the conditions in which Prob-EC outperforms our previous EC dialect — Crisp-EC. Prob-EC is the first EC dialect able to deal with uncertainty in the input STA. Moreover, this is the first approach that thoroughly evaluates EC in a probabilistic framework. The full code of Prob-EC, along with the dataset on which experimentation is performed, is directly available from the authors.

The remainder of the paper is organised as follows. In the following section we set our work in context. In Section 3 we present Crisp-EC while in Sections 4 and 5 we describe, respectively, the dataset on which we perform activity recognition and the corresponding knowledge base of LTA definitions. Section 6 briefly introduces ProbLog while Section 7 describes Prob-EC. Our experimental results, including the comparison between Prob-EC and Crisp-EC, are presented in Section 8. Finally, in Section 9 we summarise our observations and outline directions for further research.

2 Related Work

Numerous recognition systems have been proposed in the literature. In this section we focus on long-term activity (LTA) recognition systems that, similar to our approach, exhibit a formal, declarative semantics.

A fair amount of recognition systems is logic-based. Notable approaches include the Chronicle Recognition System [11], the Event Calculus dialect of Paschke et al. [28, 27] and the hierarchical event representation of Hakeen and Shah [15]. Three recent reviews of logic-based recognition systems may be found in [10, 29, 2]. These systems are common in that they employ logic-based methods for representation and inference, but are unable to handle noise.

Shet et al. [34, 35] have presented a logic programming approach to activity recognition which touches upon the issue of data coming from noisy sensors. In that work, LTA concerning theft, entry violation, unattended packages, and so on, have been defined. Within their activity recognition system, Shet and colleagues have incorporated mechanisms for reasoning over rules and facts that have an uncertainty value attached. Uncertainty in rules corresponds to a measure of rule reliability. On the other hand, uncertainty in facts represents the detection probabilities of the short-term activities (STA). In the VidMAP system [34], a mid-level module which generates Prolog facts automatically ‘filters out’ data that a low-level image processing module has misclassified (such as a tree mistaken for a human).

Shet and colleagues have noted of the ‘filtering’ carried out by this module that ‘...it does so by observing whether or not the object has been persistently tracked’ [34, p. 2]. In [35], an algebraic data structure known as a bilattice [13] is used to detect human entities based on uncertain output of part-based detectors, such as head or leg detectors. The bilattice structure associates every STA or LTA with two uncertainty values, one encoding available information and the other encoding confidence. The more confident information is provided, the more probable the respective LTA becomes.

Probabilistic graphical models have been applied on a variety of activity recognition applications where uncertainty exists. Activity recognition requires processing streams of timestamped STA and, therefore, numerous activity recognition methods are based on sequential variants of probabilistic graphical models, such as Hidden Markov Models [30], Dynamic Bayesian Networks [25] and Conditional Random Fields [22]. Compared to logic-based methods, graphical models can naturally handle uncertainty but their propositional structure provides limited representation capabilities. To model LTA that involve a large number of relations among STA, such as interactions between multiple persons and/or objects, the structure of the model may become prohibitively large and complex. To overcome such limitations, these models have been extended in order to support more complex relations. Examples of such extensions include representing interactions involving multiple domain objects [6, 14, 42, 39], capturing long-term dependencies between states [17], as well as describing a hierarchical composition of activities [26, 23]. However, the lack of a formal representation language makes the definition of complex LTA complicated and the integration of domain background knowledge very hard.

Markov Logic Networks (MLN) [31] have also been used for representing uncertainty in activity recognition. MLN employ first-order logic representation, where each formula may be associated with a weight, indicating the confidence we have on the formula. The knowledge base of weighted formulas is translated into a Markov network where probabilistic inference is performed. The approach of Biswas et al. [5], for example, uses MLN to recognise LTA given the STA that have been observed by low-level classifiers. A more expressive approach that can represent persistent and concurrent LTA, as well as their starting and ending time-points, is proposed by Helaoui et al. [16]. The method of Sadilek and Kautz [32] employs hybrid-MLN [41] in order to recognise successful and failed interactions between multiple humans using noisy location data. Similar to pure MLN-based methods, the knowledge base is composed by LTA definitions. However, hybrid formulas aiming to remove the noise from the location data are also included. Hybrid formulas are defined as normal formulas, but their weights are also associated with a real-valued function, such as the distance of two persons. As a result, the confidence of the formula is defined by both its weight and function. Although these methods incorporate first-order logic representation,

the presented LTA definitions have a limited temporal representation — for instance, temporal constraints are defined over successive instants of time.

A method that uses interval-based temporal relations is proposed in [24]. The aim of the method is to determine the most consistent sequence of LTA based on the observations of low-level classifiers. Similar to [38, 18], the method uses MLN to express LTA using common sense rules. In contrast to [38, 18], it employs temporal relations based on Allen’s Interval Algebra (IA) [1]. In order to avoid the combinatorial explosion of possible intervals that IA may produce, a bottom-up process eliminates the unlikely LTA hypotheses. In [7, 33] a probabilistic extension of Event Logic [36] is proposed in order to perform interval-based activity recognition. Similar to MLN, the method defines a probabilistic model from a set of weighted LTA. However, the Event Logic representation avoids the enumeration of all possible interval relations.

The main difference of our approach with respect to the aforementioned lines of work concerns the fact that we use the Event Calculus (EC) for temporal representation and reasoning. EC has built-in rules for complex temporal representation, including the formalisation of inertia, which help considerably the system designer in developing activity definitions. With the use of EC one may develop intuitive, succinct activity definitions, facilitating the interaction between activity definition developer and domain expert, and allowing for code maintenance. Furthermore, being logic programming-based, its translation to a probabilistic logic programming framework such as ProbLog is a straightforward process. To the best of our knowledge, the probabilistic EC dialect presented in this paper, Prob-EC, is the first EC dialect able to deal with uncertainty in STA detection.

A MLN-based approach that is complementary to our work is that of Skarlatidis et al. [37], which introduces a probabilistic EC dialect based on MLN. This dialect and Prob-EC tackle the problem of probabilistic inference from different viewpoints. Prob-EC handles noise in the input stream, represented as detection probabilities of the STA. The MLN-based EC dialect, on the other hand, emphasises uncertainty in activity definitions in the form of rule weights.

ProbLog and MLN are closely related. A notable difference between them is that MLN, as an extension of first-order logic, are not bound by the closed-world assumption. There exists a body of work that investigates the connection between the two frameworks. Bruynooghe et al. [8], for example, developed an extension of ProbLog which is able to handle first-order formulas with weighted constraints. Fierrens et al. [12] converted probabilistic logic programs to ground MLN and then used state-of-the-art MLN inference algorithms to perform inference on the transformed programs.

Predicate	Meaning
$\text{happensAt}(E, T)$	Event E is occurring at time T
$\text{initially}(F = V)$	The value of fluent F is V at time 0
$\text{holdsAt}(F = V, T)$	The value of fluent F is V at T
$\text{initiatedAt}(F = V, T)$	At time T a period of time for which $F = V$ is initiated
$\text{terminatedAt}(F = V, T)$	At time T a period of time for which $F = V$ is terminated

Table 1: Main Predicates of Crisp-EC.

3 The Event Calculus

Our LTA recognition system is based on a logic programming (Prolog) implementation of an EC dialect. EC, introduced in [21], is a many-sorted, first-order predicate calculus for representing and reasoning about events and their effects. For the dialect presented here — Crisp-EC — the time model is linear and may include real numbers or integers. Where F is a *fluent* — a property that is allowed to have different values at different points in time — the term $F = V$ denotes that fluent F has value V . Boolean fluents are a special case in which the possible values are true and false. Informally, $F = V$ holds at a particular time-point if $F = V$ has been *initiated* by an event at some earlier time-point, and not *terminated* by another event in the meantime.

We represent STA as events and LTA as fluents. In this way, we can express the conditions in which the occurrence of a STA initiates or terminates a LTA.

An *event description* in Crisp-EC includes rules that define, among other things, the event occurrences (with the use of the `happensAt` predicate), the effects of events (with the use of the `initiatedAt` and `terminatedAt` predicates), and the values of the fluents (with the use of the `initially` and `holdsAt` predicates). Table 1 summarises the main predicates of Crisp-EC. Variables, starting with an upper-case letter, are assumed to be universally quantified unless otherwise indicated. Predicates, function symbols and constants start with a lower-case letter.

The domain-independent rules for `holdsAt` can be written in the following

form:

$$\begin{aligned} \text{holdsAt}(F = V, T) \leftarrow & \\ & \text{initiatedAt}(F = V, T_s), \\ & T_s < T, \\ & \text{not broken}(F = V, T_s, T) \end{aligned} \quad (1)$$

$$\begin{aligned} \text{broken}(F = V, T_s, T) \leftarrow & \\ & \text{terminatedAt}(F = V, T_f), \\ & T_s < T_f < T \end{aligned} \quad (2)$$

$$\begin{aligned} \text{broken}(F = V_1, T_s, T) \leftarrow & \\ & \text{initiatedAt}(F = V_2, T_f), \\ & V_1 \neq V_2, \\ & T_s < T_f < T \end{aligned} \quad (3)$$

not in rule (1) represents ‘negation by failure’, which provides a form of default persistence —‘inertia’— of fluents. According to rule (1), $F = V$ holds at time-point T if the fluent F has been initiated to value V at an earlier time T_s , and has not been broken since. According to rule (2), a period of time for which $F = V$ holds is broken at T_f if $F = V$ is terminated at T_f . Rule (3) dictates that if $F = V_2$ is initiated at T_f then effectively $F = V_1$ is terminated at T_f , for all other possible values V_1 of F . Rule (3) therefore ensures that a fluent cannot have more than one value at any time. We do not insist that a fluent must have a value at every time-point. In Crisp-EC there is a difference between initiating a Boolean fluent $F = \text{false}$ and terminating $F = \text{true}$: the first implies, but is not implied by, the second.

According to rules (1)–(3), $F = V$ does not hold at the time it was initiated, while it holds at the time it was terminated.

Besides the domain-independent rule $\text{initiatedAt}(F = V, 0) \leftarrow \text{initially}(F = V)$, the definitions of initiatedAt and terminatedAt are domain-specific. One common form of rule for initiatedAt is the following:

$$\begin{aligned} \text{initiatedAt}(F = V, T) \leftarrow & \\ & \text{happensAt}(E, T), \\ & \text{Conditions}[T] \end{aligned} \quad (4)$$

where $\text{Conditions}[T]$ is some set of further conditions referring to time-point T .

terminatedAt rules are handled similarly. In Section 5 we illustrate the use of initiatedAt and terminatedAt rules for expressing LTA definitions.

4 Short-Term Activities

In this paper we use the first dataset of the CAVIAR project¹ to perform LTA recognition. This dataset includes 28 surveillance videos of a public

¹<http://homepages.inf.ed.ac.uk/rbf/CAVIAR/>

space. The videos are staged — actors walk around, sit down, meet one another, leave objects behind, fight, and so on. Each video has been manually annotated by the CAVIAR team in order to provide the ground truth for both STA and LTA. For this set of experiments, the input to our recognition system is:

- (i) The STA *walking*, *running*, *active* (non-abrupt body movement in the same position) and *inactive* (standing still), together with their time-stamps, that is, the video frame in which that STA took place. All of these activities are mutually exclusive and are represented by means of the `happensAt` predicate. For example, `happensAt(active(id6), 15560)` expresses that *id₆* displayed ‘active’ bodily movement at time-point 15560. STA are represented as instantaneous events in EC in order to use the `initiatedAt` and `terminatedAt` predicates to express the conditions in which these activities initiate and terminate a LTA.
- (ii) The coordinates of the tracked people and objects as pixel positions at each time-point, as well as their orientation. The coordinates are represented with the use of the `holdsAt` predicate. `holdsAt(coord(id2)=(14, 55), 10600)`, for example, expresses that the coordinates of *id₂* are (14, 55) at time-point 10600. Orientation is also encoded using the `holdsAt` predicate. For instance, `holdsAt(orientation(id2)=120, 10600)` expresses that, in the two-dimensional projection of the video, the same person was forming a 120° angle with the x-axis at the same time-point. This type of information is necessary for computing the distance between two entities as well as the direction to which a person might be headed.
- (iii) The first and the last time a person or object is tracked (‘appears’ and ‘disappears’). This type of input is represented using the `happensAt` predicate. For example, `happensAt(appear(id10), 300)` expresses that *id₁₀* is first tracked at time-point 300.

Given such input, Crisp-EC recognises the following LTA: a person leaving an object, people meeting, moving together, or fighting. Long-term activities are represented as EC fluents. For instance, `holdsAt(moving(id1, id3)=true, 140)` states that *id₁* was moving together with *id₃* at time-point 140.

LTA recognition is based on a knowledge base of LTA definitions expressed in terms of `initiatedAt` and `terminatedAt`. In the next section, we present example definition fragments of the LTA knowledge base.

5 Long-Term Activity Definitions

The ‘leaving an object’ activity is defined as follows:

$$\begin{aligned} \text{initiatedAt}(\text{leaving\_object}(P, \text{Obj}) = \text{true}, T) \leftarrow \\ \text{happensAt}(\text{appear}(\text{Obj}), T), \\ \text{happensAt}(\text{inactive}(\text{Obj}), T), \\ \text{holdsAt}(\text{close}(P, \text{Obj}, 30) = \text{true}, T), \\ \text{holdsAt}(\text{person}(P) = \text{true}, T) \end{aligned} \quad (5)$$

$$\begin{aligned} \text{terminatedAt}(\text{leaving\_object}(P, \text{Obj}) = \text{true}, T) \leftarrow \\ \text{happensAt}(\text{disappear}(\text{Obj}), T) \end{aligned} \quad (6)$$

In the CAVIAR videos an object carried by a person is not tracked — only the person that carries it is tracked. The object will be tracked (‘appear’) if and only if the person leaves it somewhere. Moreover, objects (as opposed to persons) can only exhibit the *inactive* STA. Accordingly, rule (5) expresses the conditions in which ‘leaving an object’ is recognised. The fluent recording this activity, *leaving_object*(*P*, *Obj*), becomes true at time *T* if *Obj* ‘appears’ at *T*, its STA at *T* is ‘inactive’, and there is a person *P* ‘close’ to *Obj* at *T*. The *close*(*ID1*, *ID2*, *Threshold*) fluent expresses that the distance between *ID1* and *ID2* is at most *Threshold* pixels. This fluent is defined as follows:

$$\begin{aligned} \text{holdsAt}(\text{close}(\text{ID1}, \text{ID2}, \text{Threshold}) = \text{true}, T) \leftarrow \\ \text{holdsAt}(\text{distance}(\text{ID1}, \text{ID2}) = \text{Dist}, T), \\ \text{Dist} < \text{Threshold} \end{aligned} \quad (7)$$

The distance between two tracked objects/people is computed as the euclidean distance between their coordinates in the two-dimensional projection of the video — recall that the coordinates of each tracked entity are given as input to our system.

The 30 pixel distance threshold in rule (5) was determined from an empirical analysis of the CAVIAR dataset.

An object that is picked up by someone is no longer tracked (it ‘disappears’) which in turn terminates *leaving_object* — see rule (6).

In CAVIAR there is no explicit information that a tracked entity is a person or an inanimate object. Therefore, in our activity definitions we try to deduce whether a tracked entity is a person or an object given the detected STA. We defined the fluent *person*(*P*) to have value true if *P* has exhibited

a walking, active or running STA at some time-point since P ‘appeared’.

$$\begin{aligned}
&\text{initiatedAt}(\text{person}(P) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{walking}(P), T) \\
&\text{initiatedAt}(\text{person}(P) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{active}(P), T) \\
&\text{initiatedAt}(\text{person}(P) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{running}(P), T) \\
&\text{terminatedAt}(\text{person}(P) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{disappear}(P), T)
\end{aligned} \tag{8}$$

The value of $\text{person}(P)$ is time-dependent because in CAVIAR the identifier P of a tracked entity that ‘disappears’ (is no longer tracked) at some point may be used later to refer to another entity that ‘appears’ (becomes tracked), and that other entity may not necessarily be a person. Note, finally, that rule (5) incorporates a (reasonable) simplifying assumption, that a person entity will never exhibit ‘inactive’ activity at the moment it first ‘appears’ (is tracked). If an entity is ‘inactive’ at the moment it ‘appears’ it can be assumed to be an object, as in the first two conditions of rule (5).

In a similar way, we may express the definitions of other LTA. The use of EC, in combination with the full power of logic programming, allows us to express LTA definitions including complex temporal, spatial or other constraints. Below we present fragments of the remaining LTA definitions.

meeting (of two persons P_1 and P_2) is recognised when two people ‘interact’: at least one of them is active or inactive, the other is not running, and the distance between them is at most 25 pixels (all numeric constraints were determined from an empirical analysis of the dataset). In CAVIAR, this interaction phase can be seen as some form of greeting, such as a handshake. Rules (9) and (10) show the conditions in which *meeting* is initiated:

$$\begin{aligned}
&\text{initiatedAt}(\text{meeting}(P_1, P_2) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{inactive}(P_1), T), \\
&\quad \text{holdsAt}(\text{close}(P_1, P_2, 25) = \text{true}, T), \\
&\quad \text{holdsAt}(\text{person}(P_1) = \text{true}, T), \\
&\quad \text{holdsAt}(\text{person}(P_2) = \text{true}, T), \\
&\quad \text{not happensAt}(\text{running}(P_2), T), \\
&\quad \text{not happensAt}(\text{active}(P_2), T)
\end{aligned} \tag{9}$$

$$\begin{aligned}
&\text{initiatedAt}(\text{meeting}(P_1, P_2) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{active}(P_1), T), \\
&\quad \text{holdsAt}(\text{close}(P_1, P_2, 25) = \text{true}, T), \\
&\quad \text{holdsAt}(\text{person}(P_2) = \text{true}, T), \\
&\quad \text{not happensAt}(\text{running}(P_2), T)
\end{aligned} \tag{10}$$

meeting is terminated by a plethora of conditions, such as when one of the two people involved in the LTA starts running or ‘disappears’.

The activity *moving* was defined in order to recognise whether two people are walking along together:

$$\begin{aligned}
&\text{initiatedAt}(\text{moving}(P_1, P_2) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{walking}(P_1), T), \\
&\quad \text{happensAt}(\text{walking}(P_2), T), \\
&\quad \text{holdsAt}(\text{close}(P_1, P_2, 34) = \text{true}, T), \\
&\quad \text{holdsAt}(\text{orientation}(P_1) = Or_1, T), \\
&\quad \text{holdsAt}(\text{orientation}(P_2) = Or_2, T), \\
&\quad |Or_1 - Or_2| < 45
\end{aligned} \tag{11}$$

In order to recognise *moving*, both people involved have to be *walking* while being close to each other. In addition, they have to be facing towards, more or less, the same direction (people walking in opposite directions are not assumed to be walking along together). This is accomplished by constraining their orientations so that they are, roughly, headed towards the same area while they are walking.

LTA — in contrast to STA — are not mutually exclusive. For example, *meeting* may overlap with *moving*: two people interact and then start *moving*, that is, they walk while being *close* to each other. In general, however, there is no fixed relationship between LTA.

moving is terminated when either person walks away from the other with respect to the predefined threshold of 34 pixels:

$$\begin{aligned}
&\text{terminatedAt}(\text{moving}(P_1, P_2) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{walking}(P_1), T), \\
&\quad \text{holdsAt}(\text{close}(P_1, P_2, 34) = \text{false}, T)
\end{aligned} \tag{12}$$

Other termination conditions for *moving* include either person running away from the other, as well as either person ‘disappearing’ from the scene.

The last definition concerns the *fighting* activity. In earlier experiments [4], we formalised *fighting* in terms of the *running* and *active* STA. This formalisation resulted to very poor recognition accuracy. This was mainly due to the limited CAVIAR STA dictionary. To overcome this problem, we manually edited the CAVIAR annotation by introducing the STA *abrupt*, which describes a person swaying his arms or legs violently. This is a form of STA that can be tracked by several state-of-the-art STA detection systems, such as the one presented in [20]. In this way, we may formalise *fighting* as follows:

$$\begin{aligned}
&\text{initiatedAt}(\text{fighting}(P_1, P_2) = \text{true}, T) \leftarrow \\
&\quad \text{happensAt}(\text{abrupt}(P_1), T), \\
&\quad \text{holdsAt}(\text{close}(P_1, P_2, 44) = \text{true}, T), \\
&\quad \text{not happensAt}(\text{inactive}(P_2), T)
\end{aligned} \tag{13}$$

To recognise *fighting*, we require that both people are sufficiently close and at least one of them moves abruptly, while the other one is not *inactive*,

indicating that he ought to be participating in the fight somehow. *fighting* ceases to be recognised when either person involved in the activity starts walking or running away, or exits the scene.

6 A Probabilistic Logic Programming Framework

In this section we briefly present ProbLog [19], a probabilistic extension of the logic programming language Prolog. ProbLog differs from Prolog in that it allows for probabilistic facts, which are facts of the form $p_i :: f_i$. In the expression $p_i :: f_i$, p_i is a real number in the range $[0, 1]$ and f_i is a Prolog fact. If f_i is not ground, then the probability p_i is applied to all possible groundings of f_i . Classic Prolog facts are silently given probability 1.

Probabilistic facts in a ProbLog program represent random variables. Furthermore, ProbLog makes an independence assumption on these variables. This means that a rule which is defined as a conjunction of n of these probabilistic facts has a probability equal to the product of the probabilities of these facts. When a predicate appears in the head of more than one rule then its probability is computed by calculating the probability of the implicit disjunction created by the multiple rules. For example, for a predicate p with two rules $p \leftarrow l_1$ and $p \leftarrow l_2, l_3$, the probability $P(p)$ is computed as follows:

$$\begin{aligned} P(p) &= P((p \leftarrow l_1) \vee (p \leftarrow l_2, l_3)) = \\ &= P(p \leftarrow l_1) + P(p \leftarrow l_2, l_3) - P((p \leftarrow l_1) \wedge (p \leftarrow l_2, l_3)) = \\ &= P(l_1) + P(l_2) \times P(l_3) - P(l_1) \times P(l_2) \times P(l_3) \end{aligned}$$

Given the independence assumption, any subprogram L of the program's Herbrand Base has a probability equal to:

$$P(L) = \prod_{f_i \in L} p_i \cdot \prod_{f_i \notin L} (1 - p_i) \quad (14)$$

With the help of equation (14), one could compute the probability that a query q holds in a ProbLog program — *success probability* — by summing the probabilities of all subprograms that entail it:

$$P_s(q) = \sum_{L \models q} P(L) \quad (15)$$

Computing the success probability through equation (15), however, is computationally infeasible for large programs, since it involves summing through an exponential number of summands ($2^{|B_L|}$ different subprograms, where B_L is the Herbrand Base). By combining equations (14) and (15) and eliminating redundant terms, we end up with the following characterisation:

$$P_s(q) = P\left(\bigvee_{e \in \text{Proofs}(q)} \bigwedge_{f_i \in e} f_i\right) \quad (16)$$

That is, the task of computing the success probability of a query q is transformed into the task of computing the probability of the Disjunctive Normal Form (DNF) formula of equation (16). Practically, equation (16) expresses that the success probability of query q is equal to the probability that at least one of its proofs is sampled. This, unfortunately, is not a question of straightforwardly transforming the probability of the DNF to a sum of products. Every conjunction (proof) $\bigwedge_{f_i \in e} f_i$ in equation (16) expresses the

probability of a possible world that entails the proof. There are numerous such worlds possible, including those that entail other proofs as well. Consequently, if we were to translate equation (16) to a sum of products, we would assume that all different proofs are disjoint (meaning that they represent mutually exclusive worlds), which does not hold in the general case. In order to make the proofs disjoint, one would have to enhance every conjunction with negative literals, in order to exclude worlds whose probability has already been computed in previous conjunctions of the DNF. This problem is known as the *disjoint-sum problem* and is known to be #P-hard [40].

ProbLog’s approach consists of using Binary Decision Diagrams (BDDs) [9] to compactly represent the DNF of equation (16). A BDD is a binary decision tree with redundant nodes removed and isomorphic subtrees merged. The BDD nodes represent the probabilistic facts of the ProbLog program. Every node has a ‘positive’ and ‘negative’ outward edge, leading to either a child node or the special ‘true’ or ‘false’ terminal nodes. The positive outward edge of the BDD node is labelled with the probability of the respective probabilistic fact and the negative edge is labelled with the complement of that probability. Positive and negative edges represent distinct decisions on inclusion of the relevant fact in the currently sampled possible world; a positive edge signifies that the fact represented by its parent node is included in the sample with the labelled probability, whereas a negative edge signifies that the fact is not included in the sample with the complement of the same probability. Therefore, by following a path from the root node to the ‘true’ terminal node, one could sample a conjunction of the DNF formula of equation (16). The ‘negative’ outward edges offer a compact representation of the negated literals required to enhance the DNF formula in order to make it represent a disjunction over disjoint conjunctions.

ProbLog inference can be summarised in three general steps. The first step is to gather all proofs of the query q by scanning the Selective Linear Definite (SLD) tree of proofs and represent them as the DNF formula of equation (16). Afterwards, with the help of a built-in translation script, the DNF is translated to a BDD. Finally, the probability of this BDD is computed recursively, starting from the root node and assuming a probability of 1 for the ‘true’ terminal and 0 for the ‘false’ terminal.

With the help of BDDs, ProbLog inference is able to scale to queries containing thousands of different proofs [19]. ProbLog’s efficiency, as well as

the straightforward adaptation of EC to it, were the driving forces behind our decision to use this framework for activity recognition under uncertainty.

Another element of interest in ProbLog is its approach to negation. ‘Negation as failure’, expressed in Prolog by `not`, has similar semantics in ProbLog. ProbLog, after all, is bound by the closed-world assumption as well: if query q is unprovable in the logical part of the knowledge base, then *not* q has a probability of 1. However, if q is provable, even by a small probability of, say, 0.01, then the probability of *not* q will be 0. Negation as failure is not interested in probabilities; it merely checks to see whether the query is provable in the logical part of the program.

In order to compute the complement of the probability of a probabilistic fact, ProbLog provides the built-in predicate `problog_not`. For any probabilistic fact $p_i :: f_i$, we have that:

$$P_s(\text{problog\_not}(f_i)) = 1 - P_s(f_i) = 1 - p_i \quad (17)$$

The built-in predicate `problog_neg` is an extension of `problog_not` applicable to both probabilistic facts and rules. For a rule r , we have:

$$P_s(\text{problog\_neg}(r)) = 1 - P_s(r) \quad (18)$$

Finally, ‘cuts’ (!/0) should be used with care by the ProbLog programmer. This is because the nature of cuts causes certain proofs of a query to not be sought after, usually for efficiency purposes. This means, however, that ProbLog will not be able to collect the entire set of proofs for the query of interest and thus the DNF of equation (16) will represent a subset of the total proof set.

ProbLog has been fully integrated in the YAP Prolog system.² Further details, examples and code samples are available in [19] and on the ProbLog website.³

7 The Event Calculus in ProbLog

In this section, we present the necessary transformations in order to make Crisp-EC ProbLog-compatible — the result is Prob-EC. We also explain the inference procedure of Prob-EC through two examples, in order to provide some intuition into how the framework operates.

7.1 Transformation

To express our EC dialect in ProbLog we had to do some minor tweaks with respect to negation. `problog_not` can only be used on probabilistic facts

²<http://www.dcc.fc.up.pt/~vsc/Yap/>

³<http://dtai.cs.kuleuven.be/problog/>

that are part of the knowledge base. For facts that do not belong to the knowledge base, such as a STA that is not part of an input STA stream, `problog_not` fails silently and reports a probability of 0. We had to overcome this issue because our LTA definitions (see Section 5) demand that we produce a probability of 1 whenever the ‘negated’ STA is not detected, but also produce the complement of the probability of the STA whenever it is detected. Similarly to `problog_not`, `problog_neg` cannot be safely used on goals that are not inferable from the logical part of the knowledge base. In order to overcome the negation-related issues, we defined the `negate1` and `negate2` predicates in Prob-EC:

$$\begin{aligned} \text{negate}_1(\text{Fact}) &\leftarrow \text{problog\_not}(\text{Fact}) \\ \text{negate}_1(\text{Fact}) &\leftarrow \text{not } \text{Fact} \end{aligned} \quad (19)$$

$$\begin{aligned} \text{negate}_2(\text{Goal}) &\leftarrow \text{problog\_neg}(\text{Goal}) \\ \text{negate}_2(\text{Goal}) &\leftarrow \text{not } \text{Goal} \end{aligned} \quad (20)$$

We were thus able to translate our initiation conditions into a probabilistic format by combining the properties of both negation as failure and probabilistic negation. For instance, rule (13) can now be written as:

$$\begin{aligned} \text{initiatedAt}(\text{fighting}(P_1, P_2) = \text{true}, T) &\leftarrow \\ \text{happensAt}(\text{abrupt}(P_1), T), & \\ \text{holdsAt}(\text{close}(P_1, P_2, 44) = \text{true}, T), & \\ \text{negate}_1(\text{happensAt}(\text{inactive}(P_2), T)) & \end{aligned} \quad (21)$$

With rule (21) we are able to produce a probability of 1 whenever `happensAt(inactive( $P_2$ ),  $T$ )` is not part of our input, as well as produce the complement of its probability whenever it is part of our input with a probability value attached. The only case when `negate1` will produce a probability of 0 is when the probability value of its argument is 1. This is the desired behaviour.

In addition to `initiatedAt` and `terminatedAt` rules, we also have to produce correct probabilities for `holdsAt` rules. Rule (1) uses negation as failure to declare that a fluent holds its value until it is broken by some termination condition. In Prob-EC, termination conditions might also have a probability attached. We would therefore like to use this probability in order to affect the final probability of our `holdsAt` queries. To achieve this, we transformed the domain-independent rule for `holdsAt` into the following form:

$$\begin{aligned} \text{holdsAt}(F = V, T) &\leftarrow \\ \text{initiatedAt}(F = V, T_s), & \\ T_s < T, & \\ \text{negate}_2(\text{broken}(F = V, T_s, T)) & \end{aligned} \quad (22)$$

According to rule (22), the probability that $F = V$ holds at time-point T is the probability that at least one, among numerous possible, initiation conditions have occurred in the past, also taking into account the probability that

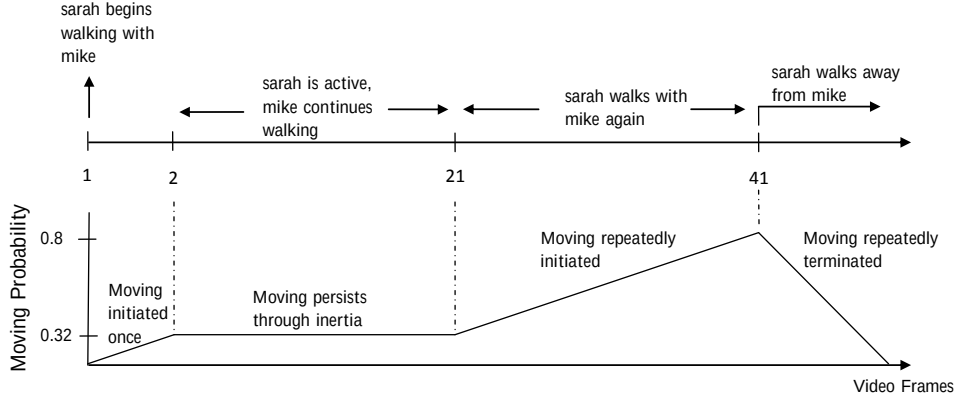


Figure 1: Example of LTA probability fluctuation in the presence of weak initiation.

the fluent might have been terminated in the meantime. The use of `negate2` in our domain-independent `holdsAt` rule ensures that, if the termination conditions affecting a given fluent F have certain probabilities, the probability that $F = V$ holds at time T will not drop to 0 immediately, but rather by a certain probability measure.

7.2 Inference

To demonstrate a typical Prob-EC inference task, suppose that two people, mike and sarah, are engaging in a ‘moving’ activity for a number of video frames — see Figure 1. The activity is first initiated at frame number 1, when both mike and sarah start *walking*. At frame 2 sarah stops *walking* (*walking* is required by rule (11) to initiate *moving*). She instead displays *active* body movement. At frame 21 sarah resumes *walking*, once again initiating *moving*. At frame 41 sarah continues *walking*, but mike is *inactive* and is therefore left behind. Consequently, sarah and mike are no longer close enough to each other, which triggers the termination condition (12) of *moving* (‘walk away’). For simplicity, let all information pertaining to orientation and coordinates (input type (ii) of Section 4) be crisp (probability of 1). Moreover, assume that the STA *walking*, *active* and *inactive* have probabilities attached, as follows:

```

0.70 :: happensAt(walking(mike), 1)
0.46 :: happensAt(walking(sarah), 1)
0.73 :: happensAt(walking(mike), 2)
0.55 :: happensAt(active(sarah), 2)
...
0.69 :: happensAt(walking(mike), 21)
0.58 :: happensAt(walking(sarah), 21)

```

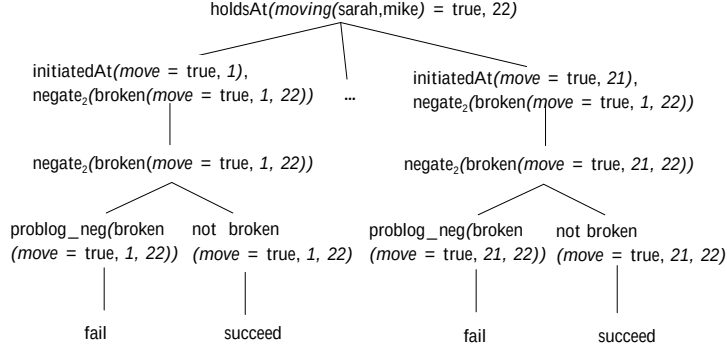


Figure 2: SLD tree for query $\text{holdsAt}(\text{moving}(\text{mike}, \text{sarah}) = \text{true}, 22)$.

...
 0.18 :: happensAt(*inactive*(mike), 41)
 0.32 :: happensAt(*walking*(sarah), 41)
 ...

At frame 2, the query $\text{holdsAt}(\text{moving}(\text{mike}, \text{sarah}) = \text{true}, 2)$ has a probability equal to the probability of the initiation condition of frame 1, which, according to rule (11) and given that all coordinate and orientation-related information (not shown above) are crisply recognised, is the product of the probabilities that both mike and sarah are *walking*, that is, $0.70 \times 0.46 = 0.322$. This is visualised at the far left of Figure 1, where the LTA's probability jumps from 0 to 0.322. From frame 2 to frame 20, mike is still *walking* but sarah is not. Therefore, no initiation or termination conditions are fired and the probability of *moving* remains unchanged. This occurs due to the law of inertia and is depicted graphically by the horizontal line between frames 2 and 20. At frame 21, however, sarah starts walking alongside mike again. Consequently, at frame 22, the query $\text{holdsAt}(\text{moving}(\text{mike}, \text{sarah}) = \text{true}, 22)$ has two initiation conditions to consider, one fired at frame 1 and one at frame 21. This occurs because rule (22) searches over all time-points between time-point 0 and the current time-point for initiation conditions, finding both the condition fired at frame 1 and the one fired at frame 21.

As mentioned in the previous section, ProbLog computes the probability of a query by first scanning the entire SLD tree of the query. Figure 2 depicts a fragment of the SLD tree for the query $\text{holdsAt}(\text{moving}(\text{mike}, \text{sarah}) = \text{true}, 22)$. The second inference step is to represent these proofs as a DNF formula. In our case, the DNF is the following:

$$\underbrace{\text{initiatedAt}(\text{moving}(\text{sarah}, \text{mike}) = \text{true}, 1)}_{\text{init}_1} \vee \underbrace{\text{initiatedAt}(\text{moving}(\text{sarah}, \text{mike}) = \text{true}, 21)}_{\text{init}_{21}} \quad (23)$$

We have simplified the representation by omitting the two relevant ‘negate₂’ clauses since, as can be seen in Figure 2, they are both provable through negation as failure and therefore have a probability of 1. This occurs because no termination conditions for *moving* have been fired between frames 1 and 22.

Up to frame 22, there exist only two initiation conditions for the *moving* LTA, *init₁* and *init₂₁* (see formula (23)). In the general case, there may exist many more initiation conditions in the interval between the start of the video and the examined video frame. In addition, for every initiation condition, rule (22) will check whether the LTA has been terminated by examining the interval between the initiation and the current video frame, repeating the process at the next video frame. This leads to numerous redundant computations. We overcame this problem by implementing an elementary caching technique according to which the probability of $\text{holdsAt}(F = V, T - 1)$ is stored in memory and, therefore, $\text{holdsAt}(F = V, T)$ simply checks to see whether the initiation or termination conditions (if any) fired at time-point $T - 1$ increase or decrease this probability. This technique operates under the assumption that the activity recognition system receives the video frames in a temporally sorted manner — this assumption holds in CAVIAR. The implementation of this simple caching technique is available with the code of our recognition system.

The third step of ProbLog inference involves translating the DNF into a BDD. However, our example is simple enough to allow us to perform manual calculations, as there exist only two proofs for holdsAt , which are easy to disjoin. The probability of DNF formula (23) can be computed as the probability of a disjunction of two elements, as explained in Section 6:

$$\begin{aligned} P(\text{init}_1 \vee \text{init}_{21}) &= P(\text{init}_1) + P(\text{init}_{21}) - P(\text{init}_1 \wedge \text{init}_{21}) = \\ &= 0.70 \times 0.46 + 0.69 \times 0.58 - 0.7 \times 0.46 \times 0.69 \times 0.58 = 0.593 \end{aligned}$$

The probability that mike and sarah are *moving* at frame 22 has increased, owing to the presence of the additional initiation condition of frame 21. This is one of the characteristics of Prob-EC: the continuous presence of initiation conditions of a particular LTA causes an increase of the probability of the LTA. This behaviour is consistent with our intuition: given continuous indication that an activity has (possibly) occurred, we are more inclined to agree that it has indeed taken place, even if the confidence of every individual indication is low. For this reason, from frame 22 up to and including frame 41, the probability of *moving* increases, as is visible in Figure 1. In this example, at frame 41 the activity’s probability has escalated to around 0.8.

At frame 42, Prob-EC has to take into consideration the termination condition that was fired at frame 41. This termination condition, corresponding to rule (12), is also probabilistic: it bears the probability that sarah walked away from mike, which, according to rule (12) and the fact that *close* is

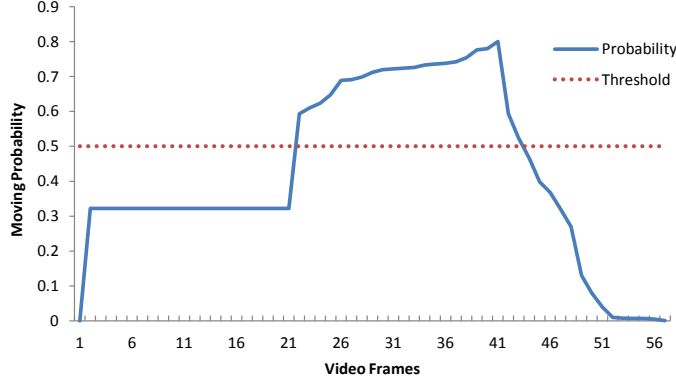


Figure 3: ProbLog output concerning $\text{holdsAt}(\text{moving}(\text{mike}, \text{sarah}) = \text{true}, T)$ for various video frames T .

crisply detected, is equal to the probability of the *walking* STA itself, which is 0.32. Therefore, when estimating the probability that, at frame 42, mike and sarah are still *moving* together, we have to incorporate the probability of all possible worlds in which sarah did not, in fact, walk away from mike. The probability of these worlds is computed by the use of negate_2 in rule (22) and is equal to $1 - 0.32 = 0.68$. Therefore, the probability that mike and sarah are still *moving* together at frame 42, in spite of the possible termination condition of frame 41, is $0.8 \times 0.68 = 0.544$. Similarly to the steady probability increase given continuous initiation conditions, when faced with subsequent termination conditions, the probability of the LTA will steadily decrease. The slope of the ascent (descent) is defined by the probability of the initiation (termination) conditions involved. For this example, we assume that sarah keeps walking away from mike until the end of the video, causing the LTA’s probability to approximate 0, as shown at the far right of Figure 1.

Figure 3 shows the precise ProbLog output for our example. After an abrupt jump from 0 to 0.322, the probability remains stable between frames 2 and 21, indicating that for this period of time the LTA persists through the law of inertia. Between frames 22 and 41, the LTA’s probability monotonically increases, reflecting the repeated initiations of *moving* that occur during that time. After frame 41, it decreases, reflecting the repeated termination conditions occurring at the same time period. The dashed horizontal line at probability 0.5 represents the recognition threshold that we use to discern between LTA positives that we consider to be trustworthy enough — these are the LTA recognitions — and those that we do not. In other domains, recognition thresholds different from 0.5 may be used.

This example presented a case of a LTA that is recognised after a certain number of subsequent initiations. We refer to LTA that may have an occurrence initiated more than once as *weakly initiated*. Additionally, there exist LTA who are *strongly initiated*, that is, a LTA occurrence is associated with

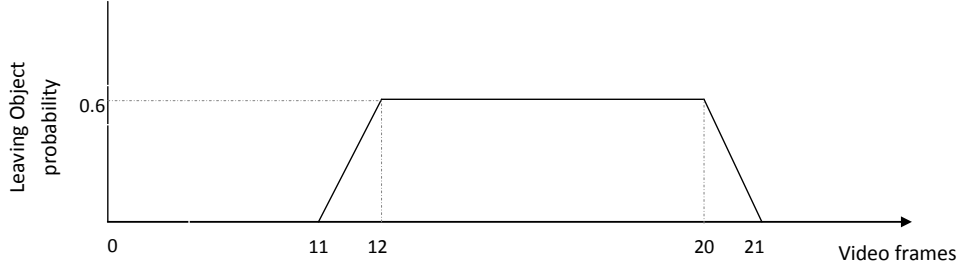


Figure 4: Example of LTA probability fluctuation in the presence of strong initiation.

only one initiation condition and the occurrence persists through the law of inertia alone. *leaving_object* is one such LTA, since it does not make much sense to assume that a person might be leaving an object for consecutive video frames.

The impact of strong initiation on Prob-EC’s recognition is significant. This is due to a lack of repeated initiations which, as explained in the previous example, cause Prob-EC to augment the LTA’s probability. The probability of a strongly initiated LTA is entirely dependent on the probability of its single initiation condition. If this probability is above the imposed recognition threshold (0.5 in our case), then the video frames during which the LTA persists will all count as recognitions. This behaviour can be demonstrated by another example — see Figure 4. Assume that *sarah* is walking while simultaneously carrying a suitcase for 10 video frames. At frame 11, she leaves the suitcase on the floor and walks away from it. This causes the suitcase to ‘appear’ in the low-level tracking system, triggering the *leaving_object* initiation condition expressed by rule (5). Suppose that this initiation condition has a probability of 0.6. At frame 20, *sarah* picks up the suitcase, causing it to ‘disappear’ and triggering termination condition expressed by rule (6). Suppose that the termination condition also has a probability of 0.6. As can be seen in Figure 4, in the absence of any initiations after frame 11, the LTA persists entirely due to the law of inertia. The probability of this LTA is equal to the probability of the single initiation condition, that is, 0.6. Because this probability is above the recognition threshold of 0.5, all frames taking place until *sarah* picks up the suitcase will be counted as recognitions. If the probability of the initiation condition was below the 0.5 threshold then *leaving_object* would not have been recognised.

Note that in Prob-EC it is possible to transform every strongly initiated LTA into a weakly initiated version of the same LTA, by considering every frame in which the strongly initiated LTA holds as an initiation condition for the weakly initiated version. The following rule shows how this could

have been implemented in the case of *leaving_object*:

$$\begin{aligned} \text{initiatedAt}(\text{leaving\_object\_weakly\_initiated}(P, \text{Obj}) = \text{true}, T) \leftarrow \\ \text{holdsAt}(\text{leaving\_object}(P, \text{Obj}) = \text{true}, T) \end{aligned} \quad (24)$$

While this transformation would have been beneficial for our experiments in the CAVIAR dataset, since we would be able to augment the probability of the weakly initiated version of *leaving_object* through multiple initiations and eventually surpass the 0.5 threshold, it introduces some subtle perils. Consider, for example, a scenario in which a *leaving_object* LTA is initiated with a very small probability, such as 0.01, indicating that the sensor’s confidence about the STA comprising rule (5) is very low. Prob-EC will then compute that *leaving_object* holds with a probability of 0.01 up until the video frame, if any, where the object in question is picked up. These positives will be correctly discarded given their very small probabilities. The weakly initiated version of *leaving_object*, however (see rule (24)), will continue to augment the probability of this LTA, eventually surpassing the threshold of 0.5 and thus producing a potentially large number of False Positives (FP), particularly if the video frames during which the object is left on the floor are numerous. While it is true that such situations do not arise in CAVIAR, it is very possible that they might take place in typical activity recognition applications, particularly where an emphasis on tracking unattended packages is given.

Similar to being weakly or strongly initiated, a LTA may be *weakly* or *strongly terminated*. For instance, *moving* is weakly terminated, as it may be terminated at consecutive video frames, while *leaving_object* is strongly terminated at the frame in which a person picks up the object. In general, there is no fixed relation between the initiation and termination of a fluent — for example, a LTA may be weakly initiated and strongly terminated. In the case of strong termination, that is, in the absence of subsequent terminations, the probability of a LTA may not drop below the (0.5) recognition threshold, thus possibly resulting in false persistence.

8 Experimental Results

We experimented on the 28 surveillance videos of the CAVIAR dataset which contain, in total, 26419 video frames. These frames have been manually annotated by the CAVIAR team to provide the ground truth for STA and LTA (we performed very minor editing of the annotation in order to introduce a STA for abrupt motion). Table 2 shows Crisp-EC’s and Prob-EC’s results. These results have been produced by computing queries of the form $\text{holdsAt}(LTA = \text{true}, T)$. Due to our implementation of Prob-EC’s negation through the `negate1` and `negate2` predicates (see Section 7), Prob-EC has identical results to Crisp-EC.

LTA	TP	FP	FN	Precision	Recall	F-measure
meeting	3099	1910	525	0.619	0.855	0.718
moving	4008	2162	2264	0.650	0.639	0.644
fighting	531	97	729	0.421	0.845	0.562
leaving object	143	1539	55	0.085	0.722	0.152

Table 2: True Positives (TP), False Positives (FP), False Negatives (FN), Precision, Recall and F-measure for Crisp-EC and Prob-EC on CAVIAR without artificial noise.

Particularly notable in the results is the low Precision for the *leaving_object* LTA, owing to a substantial number of False Positives (FP). This is due to the problematic annotation of CAVIAR with respect to this LTA. For example, in video 14, the object that is left at frame 946, triggering an initiation of *leaving_object*, is picked up (‘disappears’) at frame 1354. However, the relevant annotation mistakenly reports that *leaving_object* stops occurring at frame 996. We therefore end up with 358 FP which could have been avoided with a more consistent annotation of this video. Similarly, in the annotation of videos 17 and 18, a large number of annotated frames are missing. Video 16 includes a particularly interesting case of *leaving_object*. In this video, a person leaves a bag next to a chair, exits the scene, re-enters after a couple of seconds and picks up the bag. When the person re-enters, he is assigned a new identifier (this is common in CAVIAR). Various complications arise due to this. Firstly, the original *leaving_object* activity is not terminated by our rules when the person in question ‘disappears’. This is deliberate on our part: we choose to terminate *leaving_object* when the object is picked up rather than when the person that leaves it ‘disappears’ from the sensor’s point of view. We thus emphasize on time-points in which a package might be unattended. The CAVIAR annotation, however, views the *leaving_object* LTA from a different perspective and thus assumes that the activity is terminated when the person ‘disappears’. This difference in perspective leaves us with a substantial number of FP, one for each frame that the person is not present in the scene. When the person re-enters the scene, CAVIAR provides the person with a new identifier and resumes the annotation of *leaving_object* with a $\langle new\_person\_id, same\_object\_id \rangle$ tuple. After a couple of frames, the person (described by *new_person_id*) picks up the object, terminating a *leaving_object(new_person_id, same_object_id)* LTA occurrence which Crisp-EC never initiated in the first place. Thus, in addition to a substantial number of FP, we also generate 55 False Negatives (FN) (see Table 2) because Crisp-EC never recognises the new *leaving_object* activity.

According to the manual annotation of the CAVIAR dataset, all STA are

associated with a probability of 1. In real-world activity recognition applications it is unrealistic to assume that STA will be detected with certainty. In order to experiment with a more realistic setting, we added artificial noise to the dataset, in the form of probabilities attached to the detected STA. Toward this end, we used a Gamma distribution with a varying mean in order to represent different levels of noise.

Our experimental procedure may be summarised as follows.

- We use two different approaches for adding probabilities to the input facts:
 1. We add probabilities to STA only ('smooth noise').
 2. In addition to STA, we add probabilities to their associated coordinate and orientation fluents ('strong noise'). STA are not required to have the same probability as their associated coordinate and orientation fluents.

Thus we end up with two different noisy versions of CAVIAR.

- We feed these data to Prob-EC and filter its output — which is a series of positives of the form $Prob :: \text{holdsAt}(LTA = \text{true}, T)$ — to keep only the positives with probability of 0.5 and above, indicating that we trust these positives to be accurate.
- We filter both noisy versions of the dataset by erasing the facts with probability below 0.5. We retain the facts with probability above 0.5, removing their probability values. Thus we assume that such facts have been tracked with certainty. For 'smooth noise', this step means that we remove a certain amount of STA, whereas for 'strong noise' we additionally remove coordinate and orientation fluents.
- We give these filtered versions of CAVIAR as input to Crisp-EC. With this step we aim to estimate the impact of environmental noise in Crisp-EC, by assuming that Crisp-EC can only reason on facts that have been tracked with relative certainty, that is, facts with probability above 0.5.
- We compare the performance of Crisp-EC and Prob-EC.

We repeated the above experimental procedure 16 times, once for each Gamma distribution mean value between 0.5 and 8.0 inclusive, with a step of 0.5. Noise is added randomly; for example, a STA that is erased from Crisp-EC's input for Gamma mean 6.0 might be present at the dataset produced for Gamma mean 6.5. In our implementation, the higher the mean, the lower the probabilities attached to the ground input facts, indicating a higher amount of noise. The impact of the gradual increase of noise in

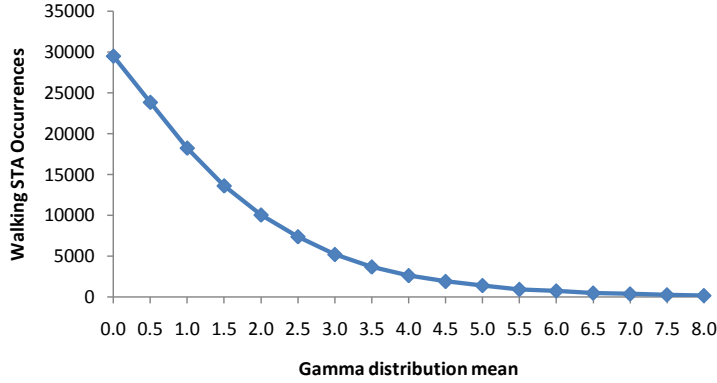


Figure 5: Occurrences of walking STA in CAVIAR per Gamma mean value. Mean value 0.0 represents the CAVIAR dataset without artificial noise.

CAVIAR’s STA can be seen in Figure 5, where the number of occurrences of the STA *walking* with probability above 0.5 is plotted. The amount of *walking* occurrences drops exponentially as we increase the level of noise. All other STA follow the same pattern. In the case of ‘strong noise’, the occurrences of coordinate and orientation fluents also drop exponentially.

Although the noise introduced may seem extreme (under high Gamma mean values), it is actually quite realistic. In activity recognition from video content, STA usually have very low probabilities — video tracking systems very rarely produce STA with high confidence.⁴

The loss of STA in the input of Crisp-EC can have a severe impact on its recognition accuracy. Certain STA or associated fluents might define initiation conditions that would have led to the recognition of LTA, if the STA had not been erased. This may lead to many FN for Crisp-EC. Termination conditions might also not be satisfied, leading to a false persistence of LTA which may create FP. Given that Crisp-EC makes mistakes in the original dataset (that is, CAVIAR without artificial noise), it may occur that a FP in the original dataset becomes a True Negative (TN) in a noise-altered version of CAVIAR (‘smooth’ or ‘strong’ noise). Similarly for FN. To demonstrate this with an example, assume that two people are *moving* along together on a pavement. Suddenly they have to step aside to allow a handicapped person full access to the pavement. In Crisp-EC, this would fire the ‘walk away’ termination condition (see rule (12)) because the distance between the two people would exceed the pre-specified threshold. This does not mean that the people have stopped *moving* — they merely had to distance themselves momentarily. Firing — erroneously — the ‘walk away’ termination condition creates FN for some video frames. If, however, the *walking* STA is not

⁴Refer, for example, to the Mind’s Eye dataset: <http://www.visint.org/datasets.html>

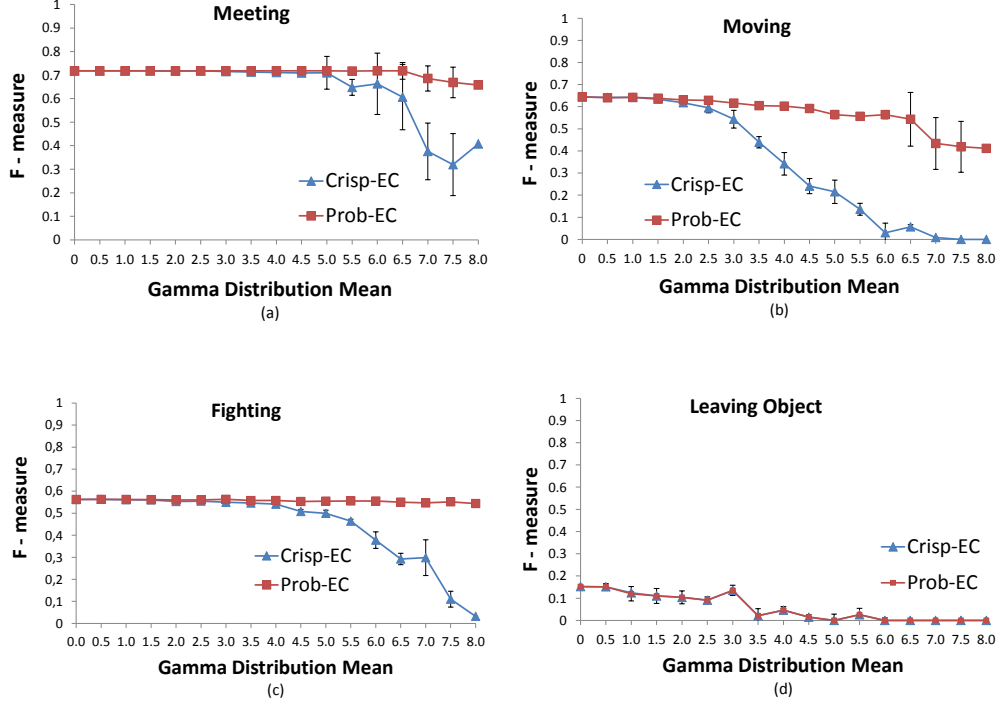


Figure 6: Crisp-EC and Prob-EC F-measure per Gamma mean value for all LTA under ‘smooth noise’.

tracked during the frames at which the people make way to the handicapped person, *moving* will never be terminated, which, in this special case, adds True Positives (TP) to the evaluation.

8.1 ‘Smooth Noise’ Experiments

Figure 6 compares the recognition accuracy of Crisp-EC and Prob-EC on all LTA of interest in terms of F-measure, under ‘smooth noise’. In all experiments, we plot the F-measure per Gamma distribution mean averaged over 5 different runs, that is, each point in the diagram is the average of 5 different F-measure values. The vertical error bars display the standard deviations.

The recognition accuracy of Prob-EC is higher than that of Crisp-EC in *meeting*, *moving* and *fighting*. In *meeting* (see Figure 6(a)), the accuracy of Crisp-EC starts falling from Gamma mean 5.0 onwards, because the *active* and *inactive* STA tend to be erased from its input, since they receive probability below 0.5 when we generate noise. Prob-EC, on the other hand, is able to initiate *meeting* with a certain degree of probability (recall that rules (9) and (10) express the conditions in which *meeting* is initiated). After a number of frames, the repeated initiation of *meeting* leads to a holdsAt

probability of 0.5 or above and thus Prob-EC eventually recognises *meeting* (refer to the first example of Section 7 for a detailed explanation of this behaviour). Those initiation conditions occur very frequently in CAVIAR. Therefore, *meeting* ends up being recognised with a probability close to 1.

In the case of *moving* (see Figure 6(b)), it is the loss of multiple occurrences of *walking* (due to noise) that causes Crisp-EC to suffer from numerous FN (see rule (11) for the initiation condition of *moving*). Prob-EC, on the other hand, uses repeated initiation to eventually surpass the recognition threshold of 0.5. The recognition accuracy of Crisp-EC in *moving* deteriorates earlier than that of *meeting*, falling behind Prob-EC from Gamma mean 2.0. This occurs because the initiation condition of *moving* bears two probabilistic conjuncts in its body, corresponding to two separate occurrences of the *walking* STA. Therefore, it is affected by noise twice. The initiation conditions of *meeting* may sometimes have two probabilistic conjuncts, but usually they have just one — the negate_1 conditions are usually crisp.

Similar to *moving* and *meeting*, Prob-EC fares better than Crisp-EC in *fighting* (see Figure 6(c)). For high levels of noise, that is, high Gamma mean values, Crisp-EC has trouble initiating *fighting* (see rule (13)), whereas Prob-EC uses repeated initiation to surpass the recognition threshold of 0.5. Prob-EC manages to surpass this threshold despite the relatively short duration of fights, compared to other LTA.

leaving_object (see Figure 6(d)) is an interesting special case, owing to the LTA’s implicit strong initiation. Recall from the discussion of Section 7 that, by strong initiation, we refer to the case where a LTA is recognised through a single occurrence of its initiation conditions and persists solely through the law of inertia. In the CAVIAR videos, a person leaves an object after a few frames in which he is walking. In rare situations it is possible that either Crisp-EC or Prob-EC miss the recognition of *person* due to noise and, consequently, the recognition of *leaving_object*. Such cases did not arise in our ‘smooth noise’ experiments. In these experiments, Prob-EC and Crisp-EC are equally accurate. When *person* is recognised by Crisp-EC, it is recognised with a sufficiently high probability by Prob-EC and vice versa. As mentioned in Section 7, we could have achieved better performance with Prob-EC on *leaving_object* in CAVIAR by introducing a weakly initiated version of the LTA, but doing so could affect the performance of our framework with respect to *leaving_object* on other activity recognition settings.

LTA in CAVIAR are usually terminated when an entity ‘disappears’ or when people walk away from each other. In the latter case, the probability of the LTA termination depends solely on that of *walking* (see, for example, rule (12)). In general, probabilistic terminations are similar to probabilistic initiations. When a termination condition is repeatedly fired with probabilities below 0.5 then Prob-EC eventually stops recognising the LTA, whereas Crisp-EC does not, producing FP.

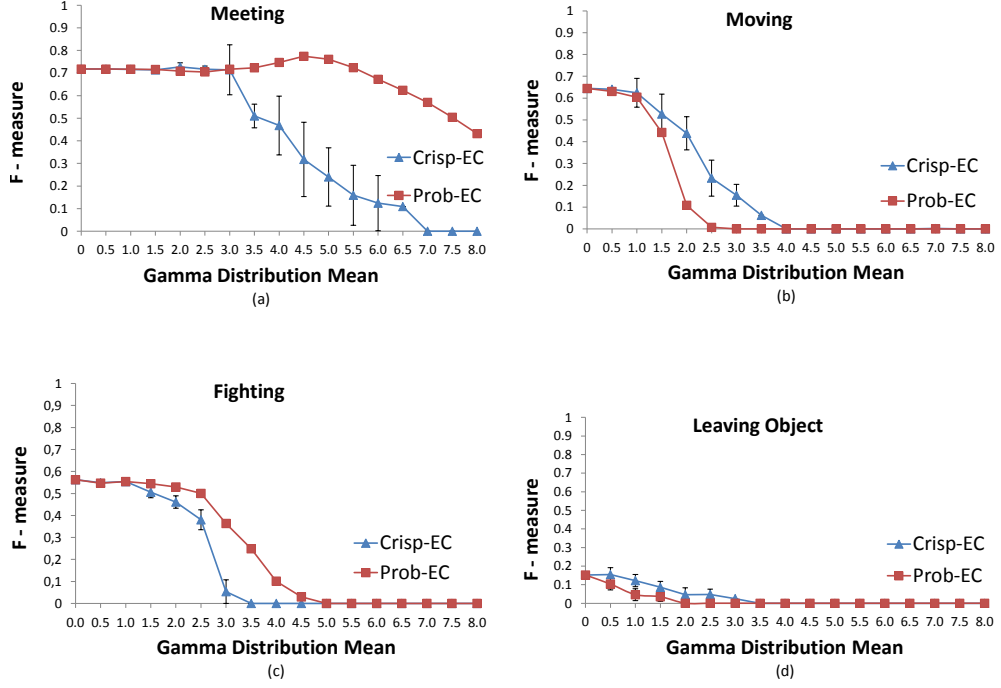


Figure 7: Crisp-EC and Prob-EC F-measure per Gamma mean value for all LTA under ‘strong noise’.

8.2 ‘Strong Noise’ Experiments

Figure 7 depicts our results under ‘strong noise’. Compared to ‘smooth noise’, both Prob-EC and Crisp-EC were more severely affected. Prob-EC outperforms Crisp-EC in *meeting* (see Figure 7(a)) even at lower noise levels, that is, lower Gamma mean values, compared to the ‘smooth noise’ experiments. This occurs because, in addition to losing the *active* and *inactive* STA due to noise, Crisp-EC now has trouble proving that entities are *close*, because under the strong noise assumption we also remove coordinate-related information, required to compute the distance between two entities. Thus, even in cases where the *active* or *inactive* STA are present and indicate that the relevant frame might be an initiation condition for *meeting*, Crisp-EC is unable to prove that the two entities are *close* enough to initiate the LTA. Prob-EC, on the other hand, uses repeated initiation to eventually break the 0.5 barrier and produce recognitions.

Concerning *moving* (see Figure 7(b)), Crisp-EC suffers again from the loss of the *walking* STA. Under ‘strong noise’, this conclusion is more striking: after Gamma mean 3.5, Crisp-EC is unable to produce a single positive. This is because, in addition to the *walking* STA and associated coordinate fluents being erased from Crisp-EC’s input, orientation fluents (which affect rule (11)) are also candidates for removal. As a result, even in cases where

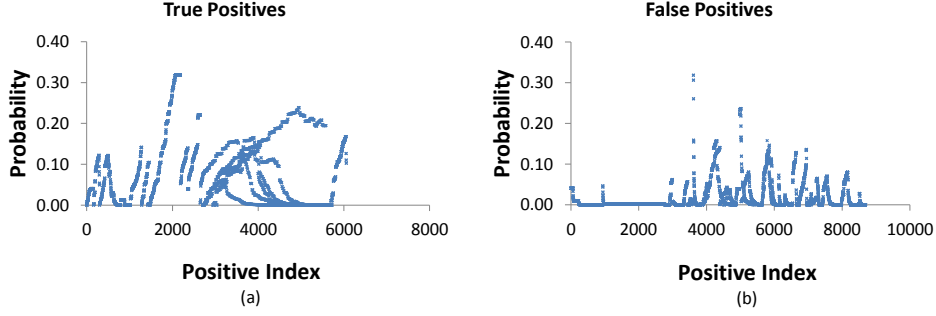


Figure 8: Probabilities of true and false positives for a Prob-EC *moving* experiment at Gamma mean 2.5.

both entities potentially involved in a *moving* activity are believed to be *walking* close to each other by the low-level tracking system, the absence of orientation information leads to an inability to initiate *moving*.

What is perhaps more interesting is that Prob-EC performs worse than Crisp-EC in *moving*. This is because whenever faced with an initiation condition for *moving*, Prob-EC has to calculate the probability of this initiation condition as a product of 6 probabilities in total. (Recall from rule (7) that *close* is defined in terms of two coordinate input facts. It therefore contributes as the product of 2 probabilities.) Consequently, Prob-EC has trouble surpassing the 0.5 recognition threshold we require to trust its positives. Even in cases of near-certainty about some conditions of the input, ProbLog’s independence assumption leads to very low probability values. Consider, for example, two entities, id_1 and id_2 , whose STA (in our case, *walking*) and associated information (coordinates, orientation) are all tracked with a probability of 0.8. Whereas Crisp-EC will be able to initiate *moving*, since all the facts will make their appearance in the input, Prob-EC will produce an initiation condition probability of $(0.8)^6 = 0.262$. Consequently, we will not trust the probability of the relevant *holdsAt* query. Furthermore, due to the fact that each initiation condition has usually a very low probability, repeated initiation does not overcome the 0.5 threshold. This phenomenon is graphically depicted in Figure 8, where we plot the probabilities of all positives for one experiment concerning *moving*, with Gamma mean 2.5. In this case, positives are ground $\text{holdsAt}(\text{moving}(ID1, ID2) = \text{true}, T)$ produced by Prob-EC. Some of these positives are true — see Figure 8(a) — and the rest are false — see Figure 8(b). In these figures, the horizontal axis represents the index of the positives. The index corresponds to the order in which a positive was generated, that is, the first positive of the video that was evaluated first has index 1, the first positive in the second video might have index 300, and so on. As shown in the graphs, not one positive of Prob-EC gains a probability above 0.5. This is despite the increasing probability of consecutive positives that is observed in some cases, which is

due to repeated initiation. Therefore, both Precision and Recall, and thus F-measure, are equal to 0.

With respect to *fighting* (see Figure 7(c)), Prob-EC outperforms Crisp-EC for certain Gamma mean values. For high Gamma mean values, Prob-EC and Crisp-EC are equally inaccurate. In the case of ‘strong noise’, there are at least three probabilistic conjuncts per initiation condition. Due to the fact that fights have a relatively short duration (much shorter than *meeting*, for example), there are not enough consecutive initiations to raise Prob-EC’s probability above the 0.5 threshold (in the case of high Gamma mean values).

Regarding *leaving_object* (see Figure 7(d)), Crisp-EC seems to fair slightly better than Prob-EC for low levels of noise, that is, low Gamma mean values. Under the ‘strong noise’ assumption, Prob-EC has to consider more probabilistic conjuncts per initiation condition, due to the presence of *close*. As a result, and given the strong initiation of *leaving_object*, Prob-EC tends to produce probabilities below 0.5 for this LTA, even in cases where the STA probabilities themselves might be above 0.5 and therefore sufficient to allow Crisp-EC to recognise *leaving_object*. For higher noise levels (Gamma mean values), Prob-EC and Crisp-EC are equally inaccurate, because the data required by Crisp-EC to initiate *leaving_object*, whether it is the *person* fluent, the *inactive* STA or the coordinate fluents of the entities involved, are missing.

8.3 Conclusions

Our experimental evaluation showed that Prob-EC outperforms Crisp-EC when:

- a LTA is weakly initiated, and
- the LTA depends on a small number of probabilistic conjuncts.

Prob-EC outperforms Crisp-EC in the aforementioned conditions from average noise levels (Gamma mean values) to high ones. (In low noise levels (Gamma mean values) Prob-EC is at least as accurate as Crisp-EC.) Moreover, Prob-EC outperforms Crisp-EC even when the duration of a LTA is relatively short, that is, when there is a small number of repeated initiations.

When a LTA depends on a large number of probabilistic conjuncts, Prob-EC may outperform Crisp-EC, but this is not always the case. ProbLog makes an independence assumption about input facts and thus the product of the probabilities of many probabilistic conjuncts may be very small, even if the probability of each individual conjunct is high. The greater the number of probabilistic conjuncts, the more initiations Prob-EC requires to surpass the (0.5) recognition threshold. In the presence of low noise levels, Crisp-EC is at least as accurate as Prob-EC, whereas when the noise levels are high Prob-EC is at least as accurate as Crisp-EC.

In the case of strong initiation, there are situations in which Prob-EC may fare significantly better than Crisp-EC and vice versa, but these did not arise in our experiments. In general, Prob-EC is expected to have similar performance to Crisp-EC on strongly initiated LTA in the case of a small number of probabilistic conjuncts, while Crisp-EC is likely to perform better in the case of a large number of such conjuncts.

The experimental results concerning weak/strong termination are similar to those regarding weak/strong initiation. For example, Prob-EC outperforms Crisp-EC in the case of weakly terminated LTA that depend on a small number of probabilistic conjuncts. The repeated termination allows Prob-EC to stop recognising a LTA when Crisp-EC continues the recognition producing FP.

Finally, we note that Prob-EC is at least as accurate as Crisp-EC in the presence of high noise levels, considering any number of probabilistic conjuncts and any combination of weak/strong initiation/termination. Consequently, we expect that Prob-EC will fare better in real-world recognition applications where sensor data are highly noisy.

9 Summary and Future Work

We presented Prob-EC, an Event Calculus dialect for probabilistic reasoning. We performed extensive experimental evaluation of Prob-EC on a benchmark activity recognition dataset. The evaluation showed the conditions in which Prob-EC outperforms a crisp Event Calculus. Prob-EC is the first Event Calculus dialect able to deal with uncertainty in the input STA. Moreover, this is the first approach that thoroughly evaluates the Event Calculus in a probabilistic framework.

There are several directions for further work. First, we intend to experiment with additional types of noise — consider, for example, the case in which the low-level tracking system ‘confuses’ two STA. Second, we aim to extend Prob-EC in order to support intervals as described in [3]. We intend to allow the computation of queries of the form ‘what was the probability that mike and sarah were *moving* continuously during the interval $[21, 41]$?’ — see Figure 1. Third, we aim to incorporate advanced caching techniques in Prob-EC in order to make it suitable for run-time activity recognition, where STA arrive with a variable delay and where there is a need to dynamically update the intervals of already recognised LTA. Finally, we aim to address the issue of imprecise LTA definitions. We intend to combine the reasoning engine of Prob-EC with that of the MLN-based Event Calculus [37] in order to provide a unified framework that will be able to deal with both STA detection probabilities and imperfect LTA definitions.

Acknowledgements

This work was supported by the EU PRONTO Project (FP7-ICT 231738). We are very grateful to the ProbLog developing team whose feedback contributed greatly to our grasp of the language. The authors themselves, however, are solely responsible for any misunderstanding about its use. We have also benefited from discussions with Marek Sergot on the Event Calculus.

References

- [1] J. Allen. Maintaining knowledge about temporal intervals. *Communications of the ACM*, 26(11):832–843, 1983.
- [2] A. Artikis, G. Paliouras, F. Portet, and A. Skarlatidis. Logic-based representation, reasoning and machine learning for event recognition. In *Proceedings of Conference on Distributed Event-Based Systems (DEBS)*, pages 282–293. ACM Press, 2010.
- [3] A. Artikis, M. Sergot, and G. Paliouras. A logic programming approach to activity recognition. In *Proceedings of ACM Workshop on Events in Multimedia*, 2010.
- [4] A. Artikis, A. Skarlatidis, and G. Paliouras. Behaviour recognition from video content: A logic programming approach. *International Journal of Artificial Intelligence Tools*, 19(2):193–209, 2010.
- [5] Rahul Biswas, Sebastian Thrun, and Kikuo Fujimura. Recognizing activities with multiple cues. In Ahmed M. Elgammal, Bodo Rosenhahn, and Reinhard Klette, editors, *Workshop on Human Motion*, volume 4814 of *Lecture Notes in Computer Science*, pages 255–270. Springer, 2007.
- [6] Matthew Brand, Nuria Oliver, and Alex Pentland. Coupled hidden markov models for complex action recognition. In *CVPR*, pages 994–999. IEEE Computer Society, 1997.
- [7] W. Brendel, A. Fern, and S. Todorovic. Probabilistic event logic for interval-based event recognition. In *Computer Vision and Pattern Recognition (CVPR), 2011 IEEE Conference on*, pages 3329–3336. IEEE, 2011.
- [8] Maurice Bruynooghe, Theofrastos Mantadelis, Angelika Kimmig, Bernd Gutmann, Joost Vennekens, Gerda Janssens, and Luc De Raedt. Problog technology for inference in a probabilistic first order logic. In *ECAI 2010 - 19th European Conference on Artificial Intelligence*, 2010.

- [9] R. Bryant. Graph-based algorithms for boolean function manipulation. *IEEE Transactions on Computers*, 35(8):677–691, 1986.
- [10] G. Cugola and A. Margara. Processing flows of information: From data stream to complex event processing. *ACM Computing Surveys*, 2011.
- [11] C. Dousson and P. Le Maigat. Chronicle recognition improvement using temporal focusing and hierarchisation. In *Proceedings of International Joint Conference on Artificial Intelligence (IJCAI)*, pages 324–329, 2007.
- [12] Daan Fierens, Guy Van den Broeck, Ingo Thon, Bernd Gutmann, and Luc De Raedt. Inference in probabilistic logic programs using weighted cnf’s. In *Proceedings of the 27th Conference on Uncertainty in Artificial Intelligence (UAI), July 2011*, 2011.
- [13] Matthew L. Ginsberg. Bilattices and modal operators. In *TARK*, pages 273–287, 1990.
- [14] S. Gong and T. Xiang. Recognition of group activities using dynamic probabilistic networks. In *Computer Vision, 2003. Proceedings. Ninth IEEE International Conference on*, pages 742–749. IEEE, 2003.
- [15] A. Hakeem and M. Shah. Learning, detection and representation of multi-agent events in videos. *Artificial Intelligence*, 171(8–9):586–605, 2007.
- [16] Rim Helaoui, Mathias Niepert, and Heiner Stuckenschmidt. Recognizing interleaved and concurrent activities: A statistical-relational approach. In *PerCom*, pages 1–9. IEEE, 2011.
- [17] S. Hongeng and R. Nevatia. Large-scale event detection using semi-hidden markov models. In *Computer Vision, 2003. Proceedings. Ninth IEEE International Conference on*, pages 1455–1462. IEEE, 2003.
- [18] Aniruddha Kembhavi, Tom Yeh, and Larry S. Davis. Why did the person cross the road (there)? scene understanding using probabilistic logic models and common sense reasoning. In *ECCV (2)*, pages 693–706, 2010.
- [19] A. Kimmig, B. Demoen, L. De Raedt, V. Santos Costa, and R. Rocha. On the implementation of the probabilistic logic programming language problog. *Theory and Practice of Logic Programming*, 2010.
- [20] D. Kosmopoulos, P. Antonakaki, K. Valasoulis, A. Kesidis, and S. Perantonis. Human behaviour classification using multiple views. In *Proceedings of Hellenic Conference on Artificial Intelligence*, volume 5138. Springer, 2008.

- [21] R. Kowalski and M. Sergot. A logic-based calculus of events. *New Generation Computing*, 4(1):67–96, 1986.
- [22] John D. Lafferty, Andrew McCallum, and Fernando C. N. Pereira. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In Carla E. Brodley and Andrea Pohoreckyj Danyluk, editors, *ICML*, pages 282–289. Morgan Kaufmann, 2001.
- [23] L. Liao, D. Fox, and H. Kautz. Hierarchical conditional random fields for gps-based activity recognition. *Robotics Research*, pages 487–506, 2007.
- [24] Vlad I. Morariu and Larry S. Davis. Multi-agent event recognition in structured scenarios. In *Computer Vision and Pattern Recognition (CVPR)*, 2011.
- [25] K.P. Murphy. *Dynamic Bayesian Networks: representation, inference and learning*. PhD thesis, University of California, 2002.
- [26] P. Natarajan and R. Nevatia. Hierarchical multi-channel hidden semi markov models. In *Proc. International Joint Conference on Artificial Intelligence (IJCAI’07)*, pages 2562–2567, 2007.
- [27] A. Paschke. ECA-RuleML: An approach combining ECA rules with temporal interval-based KR event/action logics and transactional update logics. Technical Report 11, Technische Universität München, 2005.
- [28] A. Paschke and M. Bichler. Knowledge representation concepts for automated SLA management. *Decision Support Systems*, 46(1):187–205, 2008.
- [29] A. Paschke and A. Kozlenkov. Rule-based event processing and reaction rules. In *Proceedings of RuleML*, volume LNCS 5858, pages 53–66. Springer, 2009.
- [30] L. Rabiner and B. Juang. An introduction to hidden markov models. *ASSP Magazine, IEEE*, 3(1):4–16, 1986.
- [31] Matthew Richardson and Pedro Domingos. Markov logic networks. *Machine Learning*, 62(1-2):107–136, 2006.
- [32] A. Sadilek and H. Kautz. Location-based reasoning about complex multi-agent behavior. *Journal of Artificial Intelligence Research*, 43:87–133, 2012.

- [33] J. Selman, M. Amer, A. Fern, and S. Todorovic. Pel-cnf: Probabilistic event logic conjunctive normal form for video interpretation. In *Computer Vision Workshops (ICCV Workshops), 2011 IEEE International Conference on*, pages 680–687. IEEE, 2011.
- [34] V. Shet, D. Harwood, and L. Davis. VidMAP: video monitoring of activity with Prolog. In *Proceedings of International Conference on Advanced Video and Signal Based Surveillance (AVSS)*, pages 224–229. IEEE, 2005.
- [35] V. Shet, J. Neumann, V. Ramesh, and L. Davis. Bilattice-based logical reasoning for human detection. In *Proceedings of International Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1–8. IEEE, 2007.
- [36] J.M. Siskind. Grounding the lexical semantics of verbs in visual perception using force dynamics and event logic. *Journal of Artificial Intelligence Research*, 15:31–90, 2001.
- [37] Anastasios Skarlatidis, Georgios Paliouras, George A. Vouros, and Alexander Artikis. Probabilistic event calculus based on markov logic networks. In *RuleML America*, pages 155–170, 2011.
- [38] Son D. Tran and Larry S. Davis. Event modeling and recognition using markov logic networks. In *ECCV '08: Proceedings of the 10th European Conference on Computer Vision*, pages 610–623, 2008.
- [39] D.L. Vail, M.M. Veloso, and J.D. Lafferty. Conditional random fields for activity recognition. In *Proceedings of the 6th international joint conference on Autonomous agents and multiagent systems*, page 235. ACM, 2007.
- [40] L. G Valiant. The complexity of enumeration and reliability problems. *SIAM Journal on Computing*, 8:410–421, 1979.
- [41] J. Wang and P. Domingos. Hybrid markov logic networks. In *Proceedings of the 23rd national conference on Artificial intelligence*, volume 2, pages 1106–1111, 2008.
- [42] T. Wu, C. Lian, and J.Y. Hsu. Joint recognition of multiple concurrent activities using factorial conditional random fields. In *Proc. 22nd Conf. on Artificial Intelligence (AAAI-2007)*, 2007.